

In-Line Flow Meters 100 l/h – 60 m³/h



AquaAeroVitae

Calibration

Accuracy +/- 4% FS

Repeatability 0.25% FS

Materials

Body Acrylonitrilestyrene


Float/Guide Plastic / 316L Stainless Steel

Connectors UPVC union adapter socket

Operating Range

Pressure 0-6 bar

Temperature 0-60 degC

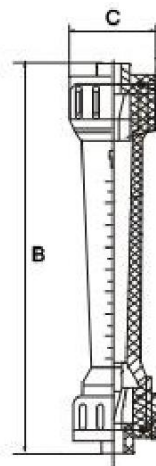

Model	Flow Range	Connection	Dim B	Dim C
FM-LZS15-100	10-100l/h	20mm socket	200 mm	43 mm
FM-LZS20-400	50-400l/h	25mm socket	232 mm	54 mm
FM-LZS25-1000	100-1000 l/h	32mm socket	234 mm	60 mm
FM-LZS25-2500	250-2500 l/h	32mm socket	234 mm	60 mm
FM-LZS32-4	400-4000 l/h	40mm socket	288 mm	74 mm
FM-LZS32-10	1-10 m ³ /h	40mm socket	288 mm	74 mm
FM-LZS50-16	1.6-16 m ³ /h	63mm socket	348 mm	98 mm
FM-LZS65-25	5-25 m ³ /h	75mm socket	430 mm	122 mm
FM-LZS65-60	12-60 m ³ /h	75mm socket	430 mm	122 mm